



Step Into the Future With Vanguard Pro Visuals.



Vanguard Pro


43" LED Standard Panel

Vistech Technolgy.Inc

www.vistechdisplay.com

Full range of compatible design

The cabinet is compatible with SMD, IMD or COB modules, and the different pixel pitch modules can be directly replaced and upgraded.

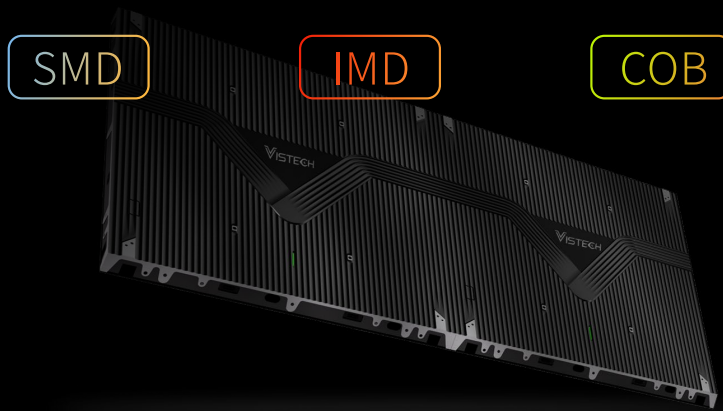

Large size, slim design, endless possibilities

The structure and materials of the cabinet are specially weight-reduced to achieve an ultra-light weight of 11 kg per cabinet, bringing great convenience for transport and installation.

Thickness **39mm** Weight **11KG**




Multiple technology solutions, creating infinite possibilities

Three innovative LED solutions satisfy diverse needs and enhance the viewing experience in semi-outdoor spaces.


SMD


 800nits Brightness

 16:9 Aspect ratio


 sRGB Colour gamut

Flip Chip SMD (high-bright)


 4000nits Brightness


 40% Energy Saving


 sRGB Colour gamut


 5X brighter than standard SMD

COB

 800nits Brightness

 40% Energy Saving


 DCI-P3 Colour gamut

 1,000,000:1 Contrast Ratio



Common cathode design for low power consumption

A common cathode design allows the Vanguard series to reduce thermal energy conversion, lower screen temperature, and achieve 40% energy savings while extending screen service life.

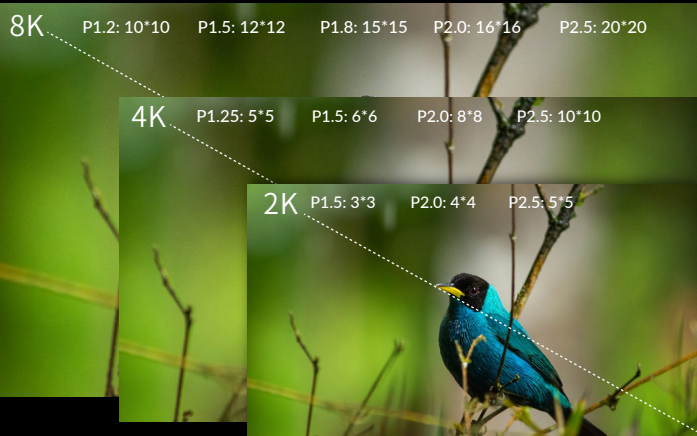



Standardized ratios for easy display of UHD/FUHD images

Combining the international standard 16:9 aspect ratio with the large-size panel design, the standard resolution of HD, UHD, or FUHD can be easily achieved with just a few panels.

Customised connector, six-way adjustment

Adopting customised connectors to connect the cabinet to the module, the module can be adjusted in six directions, giving the screen superb flatness and making the visual effect guaranteed.

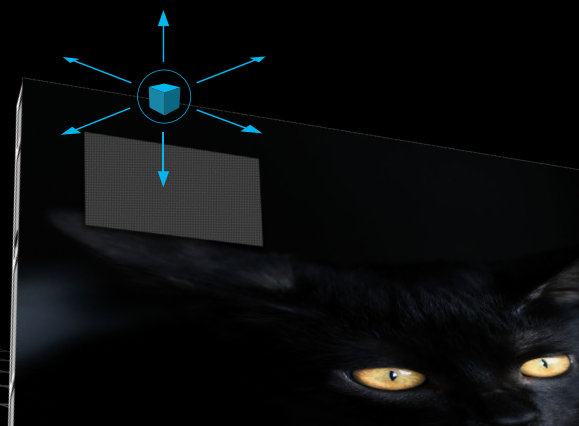

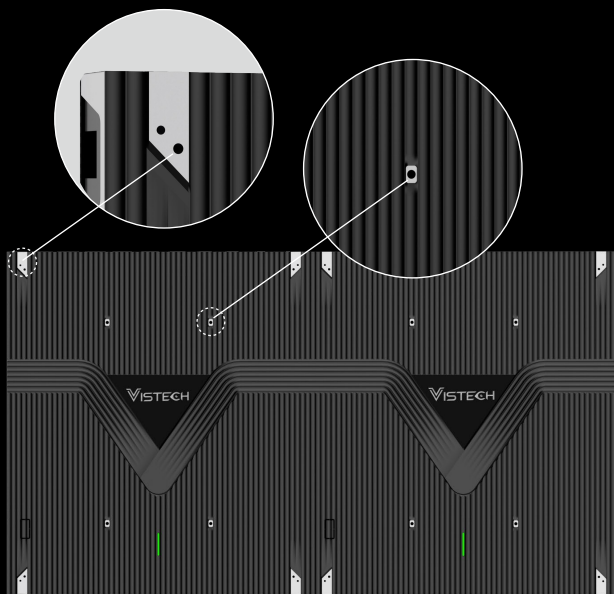

Bi-directional holes on all four corners

The four corners of the cabinet have bi-directional mounting holes, allowing for fixed installation from both the front and rear, making it suitable for a variety of installation scenarios. The back of the cabinet has VESA holes to support the assembly of VESA mounts.

Dual backup of power supply and receiving card

In the event of a failure of the main receiving card or power supply, the backup system will automatically switch over to ensure that the display is not interrupted, providing stronger stability and reliability for the large-screen display.



Perfect replacement for LCDs

Fully replace traditional 43" LCD splicing screens without changing the original installation structure.

Ultra-wide Colour Gamut for Vibrant Colours

Seamless Splicing for True-to-life Images

SPECIFICATIONS

Model	C95-09VA	C95-12VA	U95-09VA	U95-12VA	U95-15VA	U95-18VA	U95-20VA	U95-25VA	U95-12VH	U95-15VH	U95-18VH
Pixel Pitch(mm)	P0.9	P1.2	P0.9	P1.2	P1.5	P1.8	P2.0	P2.5	P1.2	P1.5	P1.8
Unit Size (W × H × D) (mm)	960*540*39	960*540*39	960*540*39	960*540*39	960*540*39	960*540*39	960*540*39	960*540*39	960*540*39	960*540*39	960*540*39
Resolution	1024*768	768*432	1024*768	768*432	640*360	512*288	480*270	384*216	768*432	640*360	512*288
Panel Technology	COB	COB	IMD 4 in 1	SMD	SMD	SMD	SMD	SMD	Flip Chip SMD (high-bright)	Flip Chip SMD (high-bright)	Flip Chip SMD (high-bright)
Brightness(nits)	800	800	800	800	800	800	800	800	4000	4000	4000
Contrast Ratio	1000000:1	1000000:1	4000:1	4000:1	4000:1	4000:1	4000:1	4000:1	20000:1	20000:1	20000:1
Color Temperature	39300K±~3000K(adjustable)										
Frame Rate(Hz)	60										
Refresh Rate(Hz)	3840										
Working Voltage	AC:100~240V, 50/60Hz										
Power Consumption Max(W/m²)	500	480	600	600	600	500	500	500	980	980	980
Lifetime(Hours)	100000										
Operating Temp(°C)	-10 ~ 50										
Humidity Range(%RH)	10 ~ 80										
Cabinet Weight (kg)	11										