




VANGUARD

LED ALL-IN-ONE

110"/130"/165"/220"

Wireless Screen Sharing | Smart Meetings | Precision Touch Control | Efficient Collaboration

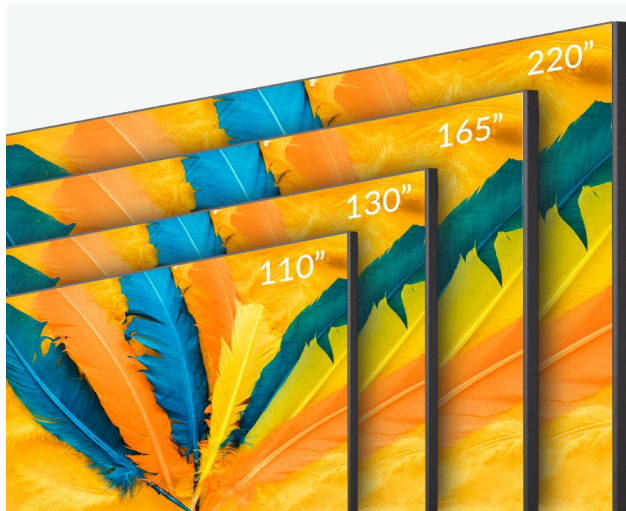

Captivating and Exquisite


800nits Brightness

Utilizing LED fine-pitch display panels, self-illuminating independent LED beads achieve a maximum brightness of 800 nits, faithfully reproducing micro-details with an ultra-wide color gamut, showcasing true-to-life colors.

Standard sizes, your choice

Available in four different display sizes: 110", 130", 165", and 220", with a 16:9 standard aspect ratio, delivering instant standard FHD images.

16:9 **FHD**




Powerful system, robust performance

Featuring an octa-core processor, high-performance GPU, and support for both Windows and Android systems, enabling seamless switching and easy installation of various applications.

Windows/Android free switch

All-in-one, simple yet extraordinary

Comes with high-quality speakers and a wide range of input and output interfaces, allowing you to easily connect external devices such as cameras and microphones.



Infrared touch control, instant interaction

Utilizing high-precision infrared touch technology for sensitive interaction, enabling effortless writing and providing an efficient meeting experience.

Sensitive Interaction
 Enabling Effortless Writing

Four display modes, versatile for all scenarios

Offering four scene modes: standard, soft, cinema, and video, ensuring the best display performance for any usage scenario.




Wireless screen sharing for four People


The Vanguard All-in-One supports wireless screen sharing on multiple platforms such as Windows, Mac OS, iOS, and Android, allowing up to four people to share their screens simultaneously.

Diverse software, comprehensive functions

Pre-installed with conference whiteboard, video conferencing, and other software, offering rich features like remote meetings, document presentations, and video playback.

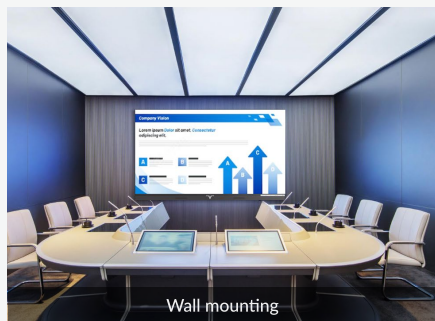

Wall mounting

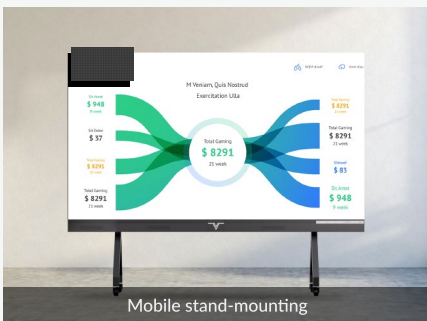

Mobile stand-mounting

Front maintenance design, quick installation

- Front maintenance design and modular assembly for convenient installation and maintenance.
- Supports wall mounting and mobile stand installation to meet various usage requirements.

SPECIFICATIONS

Model	S110LEDVC-FSN	SR110LEDVC-FSN	S130LEDVC-FSN	SR130LEDVC-FSN	S165LEDVC-FSN	SR165LEDVC-FSN	S220LEDVC-FSN
Display Size	110"	110"	130"	130"	165"	165"	220"
Resolution	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080	1920*1080
Aspect Ratio	16:9	16:9	16:9	16:9	16:9	16:9	16:9
Touch control	No	Infrared touch	No	Infrared touch	No	Infrared touch	No
Overall Dimensions (W x H x D mm)	2434 x 1493.5 x 39 Bottom Thickness 47	2447 x 1500 x 45 Bottom Thickness 47	2890 x 1750 x 39 Bottom Thickness 47	2903 x 1756.5 x 45 Bottom Thickness 47	3646 x 2175.2 x 39 Bottom Thickness 47	3659 x 2182 x 45 Bottom Thickness 47	4858 x 2857 x 39 Bottom Thickness 47
Actual Screen Dimensions (W x H mm)	2424 x 1363.5	2424 x 1363.5	2880 x 1620	2880 x 1620	3636 x 2045.25	3636 x 2045.25	4848 x 2727
Installation Method	Mobile Stand/Wall Mounting						Wall Mounting
Refresh Rate(Hz)	3840						
Brightness(nits)	800						
Gray Scale(Bit)	22						
Contrast Ratio	1000000:1						
Viewing Angle(H./V.)	160°/160°						
Maintenance Method	Front						
Operating System	Android 11.0, 4+32G						
Working Voltage	AC:100V~240V, 50/60Hz						
Power Consumption Max(W)	2050	2050	2900	2900	3800	3800	6700
Power Consumption AVG(W)	690	690	970	970	1270	1270	2240
Storage Temp(°C)	-20 ~ 60						
Operating Temp(°C)	-10 ~ 50						
Storage Humidity (%RH)	10 ~ 90						
Operating humidity (%RH)	10 ~ 80						